More Light
Less Fixture

OUTDOOR LIGHTING- **CP01**

LED Canopy Light



Descriptions

RZ's LED canopy lights are versatile and energy saving fixtures, which are ideal for parking garages, entryways, gas stations, outdoor aisles and many other commercial applications. It comes with color and wattage selectable, allowing you to customize the LED light output to best fit your project. Energy and maintenance savings up to 86% versus HID solutions, and can be easily surface/ pedant mounted.

Applications

- Parking garages
- Canopies
- Storage areas
- Outdoor aisles
- Gas stations
- Walkways
- Entryways

WARRANTY 5 YEARS | IP65 | 3Watts SELECTABLE | 3CCT SELECTABLE

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. *All Rights Reserved. Data subject to change without notice*

More Light
Less Fixture

More Light
Less Fixture

FEATURES

- Field-adjustable 3CCT & 3 wattages to reduce SKU's
- High efficacy up to 135LM/W
- AC120-277V/120-347V for options
- Perfect LED canopy lights to replace HID fixtures
- Rugged die cast aluminum housing for long last time using

PERFORMANCE SUMMARY

Model	Size（mm)	Watts	Efficacy	Volt	CCT	CRI	DIM	Beam Angle
CP01C-40	255.4*255.4*83.5	40W or 40/30/20W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	120°
CP01C-55	255.4*255.4*83.5	55W or 55/40/30W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	120°
CP01C-60	255.4*255.4*83.5	60W or 60/40/30W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	120°
CP01C-70	255.4*255.4*83.5	70W or 70/60/40W Select	135LM/W	120-277/120-347V	3000K-6500K or 3 CCT Select	>80	0-10V	120°

Remarks: All above efficiency and lumens are subject to 5000K, please check IES files for accurate data.
CP01C-XXZ-X-YY, XX denote wattage; Z denote voltage; X denote control type; YY denote color temperature or 3CCT.

PERFORMANCE

- IP Rating: IP65
- Sensor: Microwave motion sensor/ PIR sensor/ Bluetooth motion sensor
- LED Type: 2835
- THD: <20%
- Power Factor: ≥0.95
- Frequency: 50/60Hz
- Life Time >50,000Hrs
- Surge Protection: LN-PG :5KV, L-N:4KV
- Operating Temp.: -30°C to +50°C

CONSTRUCTION

- Beam Angle: 120°
- Housing: Die-cast Aluminum
- Finish Colors: Black/ white/ brown

MOUNTING

- Surface mount
- Pendant mount

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. *All Rights Reserved. Data subject to change without notice*

PRODUCT APPEARANCE

Housing
Durable
die cast
aluminum



3CCT Select
3000K/4000K/5000K


DIP Switch
3 Wattage select in the field

Optical
Polycarbonate lens
120° beam angle

Motion Sensor
Built in Microwave
motion sensor

PRODUCT DIMENSION

(unit: mm & inch)

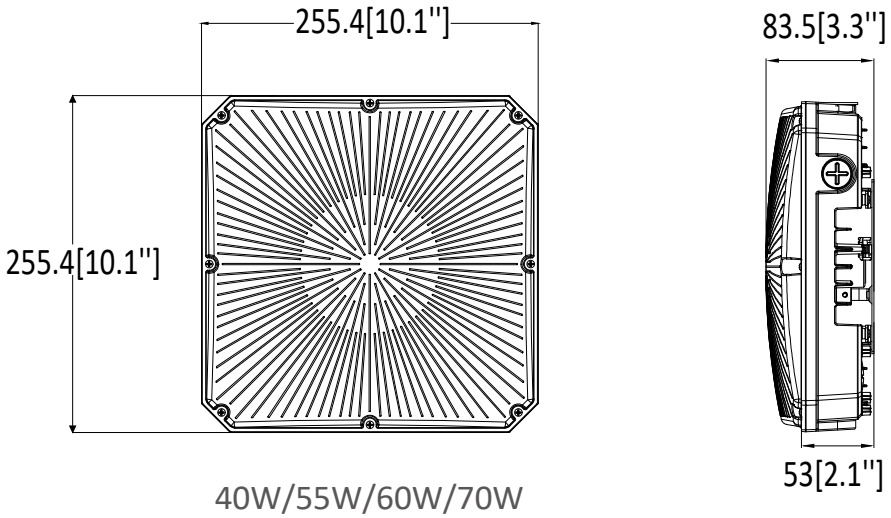

40W/55W/60W/70W

PACKING INFO

Model	Prouduct Dimension (MM&INCH)	Carton Size (MM&INCH)	Q'ty/CTN	Net Weight (KG)	Gross Weight (KG)	Carton Gross Weight	20GP (PCS)	40GP (PCS)	40HQ (PCS)
CP01C-40	255.4×255.4×83.5 (10.1"×10.1"×3.3")	595×303×250mm (23.43"×11.93"×9.84")	4	2.1	2.3	9.9	2376	4896	5440
CP01C-55	255.4×255.4×83.5 (10.1"×10.1"×3.3")	595×303×250mm (23.43"×11.93"×9.84")	4	2.2	2.4	10.3	2376	4896	5440
CP01C-60	255.4×255.4×83.5 (10.1"×10.1"×3.3")	595×303×250mm (23.43"×11.93"×9.84")	4	2.2	2.4	10.3	2376	4896	5440
CP01C-70	255.4×255.4×83.5 (10.1"×10.1"×3.3")	595×303×250mm (23.43"×11.93"×9.84")	4	2.3	2.5	10.7	2376	4896	5440

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. *All Rights Reserved. Data subject to change without notice*