
www.rzledlighting.com

LED Architectural Wall Pack - WP33

Up & Down Lighting, CCT Selectable, Power Adjustable, Photocell ON/OFF

Rev.9/5/25

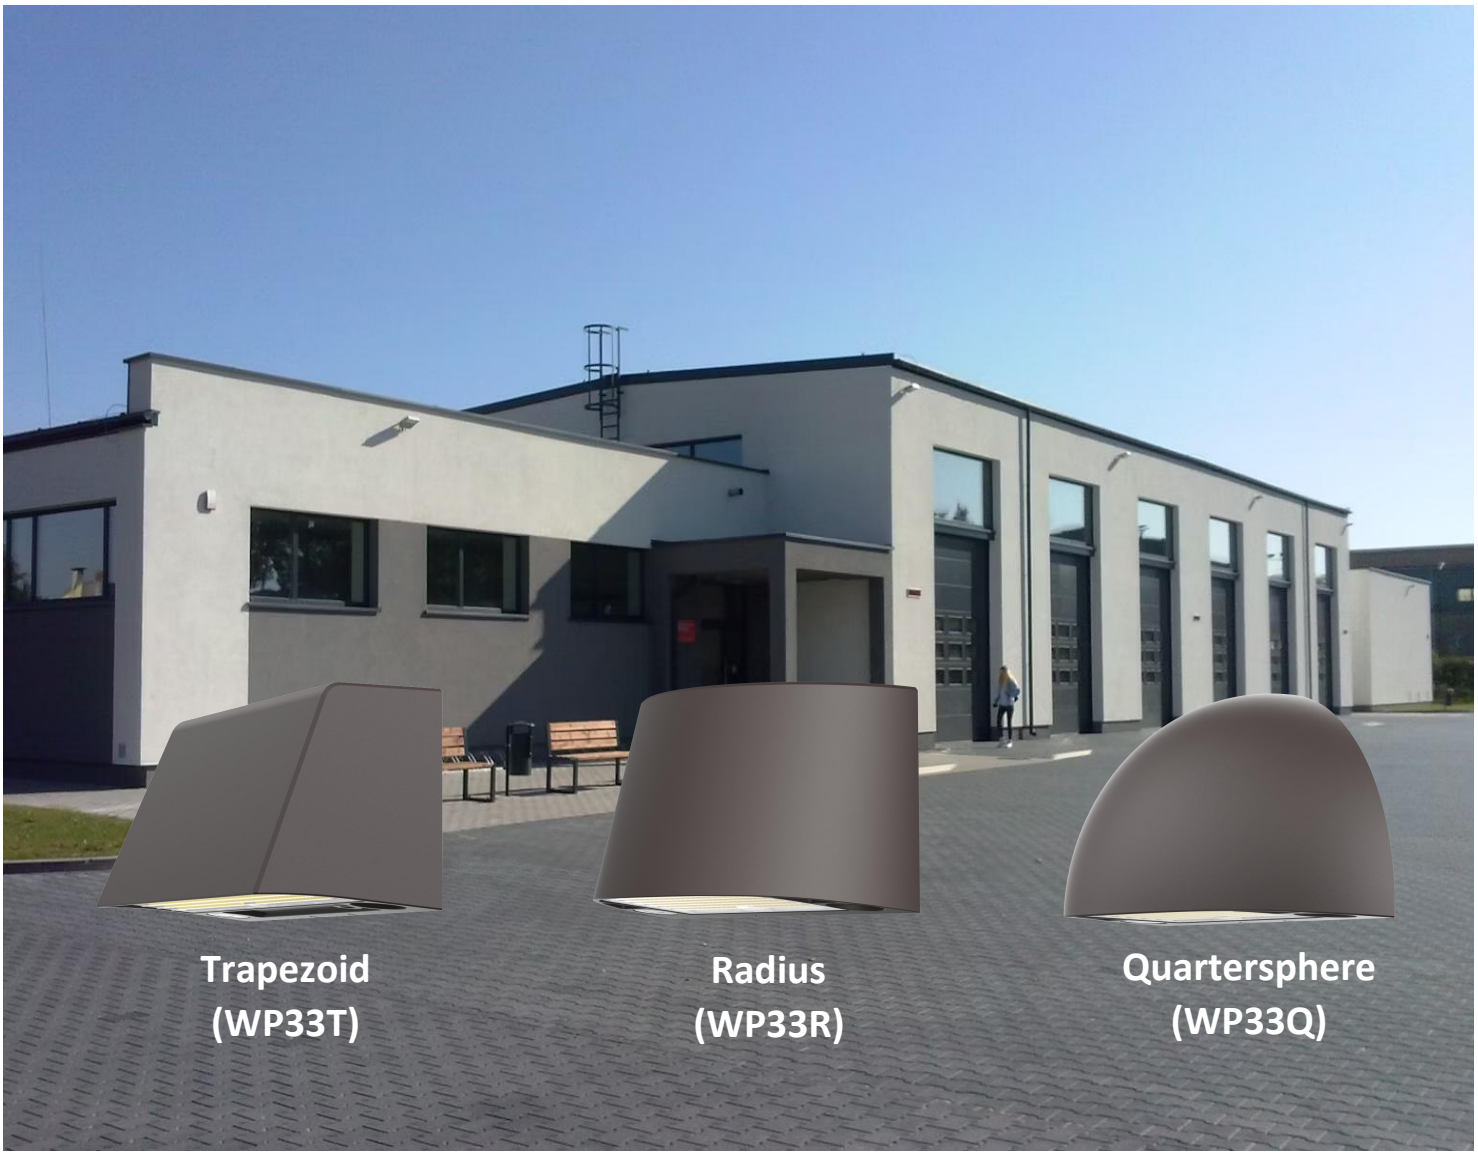

Description


RZ's new LED wall packs are your first choice for wall-mounted lighting projects. Three geometric shapes: Trapezoid, Quartersphere and Radius available for different environment. 4 IN 1 switch is selectable for lighting direction, CCT, wattage, and photocell ON/OFF control. D2D photocell can automatically turn off at sunrise or during the day, and automatically light up at sunset or night.

Application

- Pathways
- Hospitality
- Walkways
- Hallways
- Outdoor Commercial
- Outdoor Residential

Certificate

- UL
- DLC

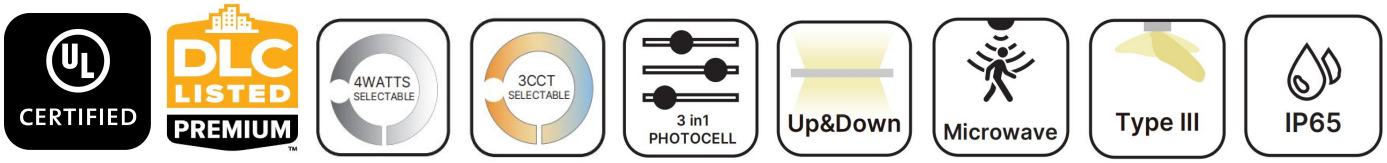

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China 518103 | T: +86-755-27803791 | W: www.rzledlighting.com

RZ Lighting Co., Ltd. ***All Rights Reserved. Data subject to change without notice.***

www.rzledlighting.com

LED Architectural Wall Pack - WP33


Key Features

- High efficacy up to 150 lm/W.
- 3CCT(3000/4000/5000K) and 4 Wattages Selectable offer SKU reduction.
- AC120-277V & AC120-347V for options.
- DIP switch for Full, Down lighting modes.
- ADC12 Aluminum die-casting housing provides excellent heat dissipation.
- Automated Dusk to Dawn photocell functionality.
- Emergency driver available(not available for 120W).
- Microwave motion sensor available.
- Waterproof rated IP65.



Die-cast aluminum housing

Durable housing provides good heat dissipation.




Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF
Light Direction Selection







Microwave motion sensor




Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF
Light Direction Selection
















Mounting Plate



Field-adjustable CCT
Field-adjustable wattage
Photocell ON/OFF





Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China 518103 | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. ***All Rights Reserved. Data subject to change without notice.***

www.rzledlighting.com

LED Architectural Wall Pack - WP33

Performance Summary

Model NO. #	Size	Watts	3 CCT	LPW	Lighting Direction	Voltage	Dim	CRI	Beam Angle
WP33T-13-40Z-AD4C3	13"	40/30/20/15W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	UP & Down Lighting Down Lighting Selectable	AC120-277V AC120-347V	0-10V	>80	Type III
WP33T-13-80Z-AD4C3		80/60/50/40W Selectable							
WP33T-13-120Z-AD4C3		120/100/90/60W Selectable							
WP33R-13-40Z-AD4C3	13"	40/30/20/15W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	UP & Down Lighting Down Lighting Selectable	AC120-277V AC120-347V	0-10V	>80	Type III
WP33R-13-80Z-AD4C3		80/60/50/40W Selectable							
WP33R-13-120Z-AD4C3		120/100/90/60W Selectable							
WP33Q-13-40Z-AD4C3	13"	40/30/20/15W Selectable	3CCT Selectable 3000K 4000K 5000K	150lm/W	Down Lighting	AC120-277V AC120-347V	0-10V	>80	Type III
WP33Q-13-80Z-AD4C3		80/60/50/40W Selectable							
WP33Q-13-120Z-AD4C3		120/100/90/60W Selectable							

Remarks: ***1.All above efficacy and lumens are subject to CRI>80 @4000K, please check IES files for accurate data.***

2. WP33Q-13-40Z-AD4C3, X denotes size; Z denotes voltage, L=AC120-277V, M=AC120-347V; A denotes function, S2 = photocell, M2 = photocell and emergency driver, S = microwave motion sensor, M = microwave motion sensor and emergency driver; D4C3 denotes 0-10 V dimming, 4 wattage, and 3 CCT selectable.

3. Factory default settings: Photocell is ON, lighting direction is full, max wattage, highest CCT.

Performance

- LED Type: SMD2835
- Frequency: 50/60HZ
- Power Factor: ≥0.90
- Life Time: L70 @ 50,000Hrs
- IP Rating: IP65
- THD: <20%
- Operating Temp.:–40°F to 122°F (-40°C to +50°C)
  32°F to 104°F (0°C to +40°C) for EM version
- Surge Protection: L/N 6KV, L/N-P 6KV
  L-N/L&N-PE:4+6KV(120-277V, 40W)

Construction

- Lens: Polycarbonate
- Housing: Die-cast aluminum
- Finish: Bronze, Custom finishes available

Mounting

- Wall Mount

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China 518103 | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. ***All Rights Reserved. Data subject to change without notice.***

www.rzledlighting.com


LED Architectural Wall Pack - WP33

Accessories (Sold separately)


Picture	Item #	Description
	ANT-5-ZT	Sharkward Zhaga Microwave Motion Sensor
	ANT-5-ZT-BLE-GE	Sharkward Zhaga Bluetooth Microwave Motion Sensor
	HD09VR-MH-1	Haisen Plug-in Microwave Motion Sensor
	HD09VR-MHB-1	Haisen Plug-in Bluetooth Microwave Motion Sensor
	RC-100	Sharkward Remote controller
	BLD-YM04S, 4W BLD-YM08S, 8W	Billda Emergency driver, 4W for 40W fixture, 8W for 80W fixture, not available for 120W fixture.

Product Dimension


(unit: mm & inch)

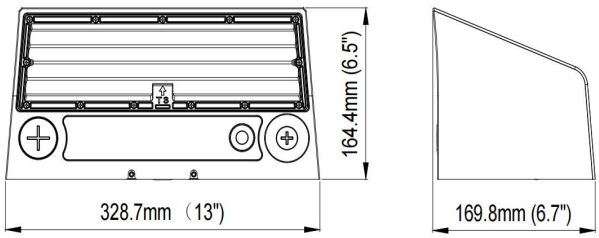

WP33T

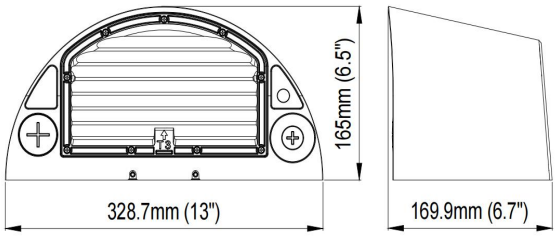

WP33R

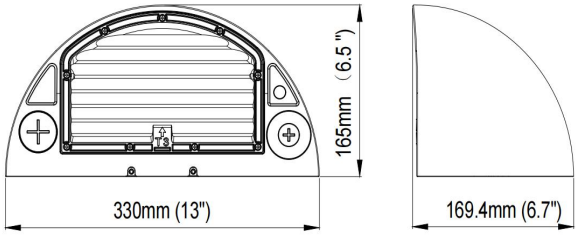

WP33Q

Packing Info.

Product Size (inch&mm)	Product & Package Weight (KG)		Carton Size (inch&mm)	Q'ty/CTN (PCS)	20GP (PCS)	40HQ (PCS)
	N.W./PC	G.W./CTN				
WP33T 13.0"*6.5"*6.7" 328.7*164.4*169.8mm	2.86	3.29	340×195×193mm	1	2101	5109
WP33R 13.0"*6.5"*6.7" 328.7*165.0*169.9mm	2.76	3.21	340×195×193mm	1	2101	5109
WP33Q 13.0"*6.5"*6.7" 330.0*165.0*169.4mm	2.45	2.94	340×195×193mm	1	2101	5109

Add: 4F, Bldg. B, Zhongjing Sci-Tech Park, 606 Fengtang Blvd, Bao'an, Shenzhen, China 518103 | T: +86-755-27803791 | W: www.rzledlighting.com
RZ Lighting Co., Ltd. ***All Rights Reserved. Data subject to change without notice.***